



THE



THT




THA



THP

## CHARACTERISTICS


- Pilot hole in concrete needed, thread is created by the anchor during the installation process.
- Use for high loads. High fire resistance.
- Assessed for 2 installation depths and 3 for Ø10.
- Use in cracked and non-cracked concrete.
- Comply with guideline VdS CEA 4001:2021-01(07) "Guidelines for sprinklers systems. Planning and installation"
- Suitable when reduced edge distances or spacing required.
- Qualified for static and quasi-static.
- Easy installation.
- Installation through the fixture.
- Reusable
- Removable, leaving concrete surface flat.
- Variety of lengths and sizes, assembly flexibility.
- VdS available from Ø6 to Ø18
- Available in INDEXcal



## SIZE RANGE

Ø5 - Ø18

## DRILL CONDITION



DRY

WET

FLOODED

MAXIMUM LOADS RECOMMENDED FOR CRACKED AND UNCRACKED CONCRETE [kg]


## APPLICATION

- Structural fixings in cracked and uncracked concrete subject to dry internal conditions.
- Glazing, windows and storefronts
- Racking and shelving
- Attaching railings, handrails and ledgers
- Fixings wood structures in concrete


## ASSESSMENTS





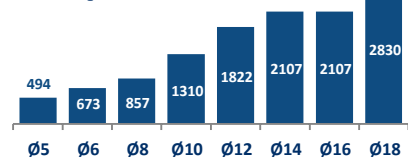



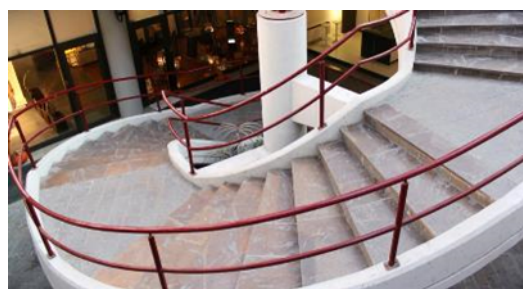

## TH/TF




## APPLICATION EXAMPLES




1. RANGE						
ITEM	CODE	SIZES	PHOTO	DESCRIPTION	MATERIAL	COVERING
1	THE	Ø5 - Ø18		Hexagonal head with flange screw anchor	Carbon steel, ATLANTIS coating	
2	THA	Ø5 - Ø10		Countersunk screw anchor	Carbon steel, ATLANTIS coating	
3	THT	Ø6		Truss head screw anchor	Carbon steel, ATLANTIS coating	
4	THP	Ø5 - Ø8		Pan head screw anchor	Carbon steel, ATLANTIS coating	

2. INSTALLATION DATA

2.1. INSTALLATION DRAWING

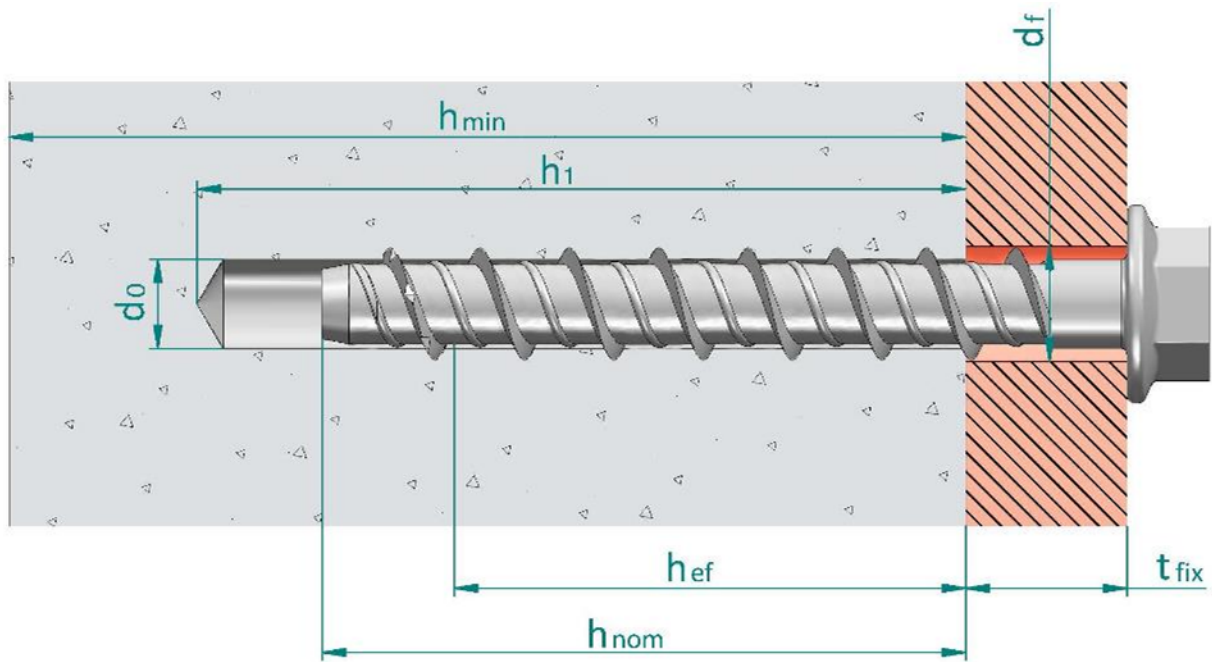

- $d_0$ : Nominal diameter of drill bit
- $d_b$ : Bottom flange thickness
- $d_f$ : Fixture clearance hole diameter
- $h_{ef}$ : Effective anchorage depth
- $h_1$ : Depth of drilled hole
- $h_{nom}$ : Overall fastener embedment depth in the concrete
- $h_{min}$ : Minimum thickness of concrete member
- $t_{fix}$ : Fixture thickness

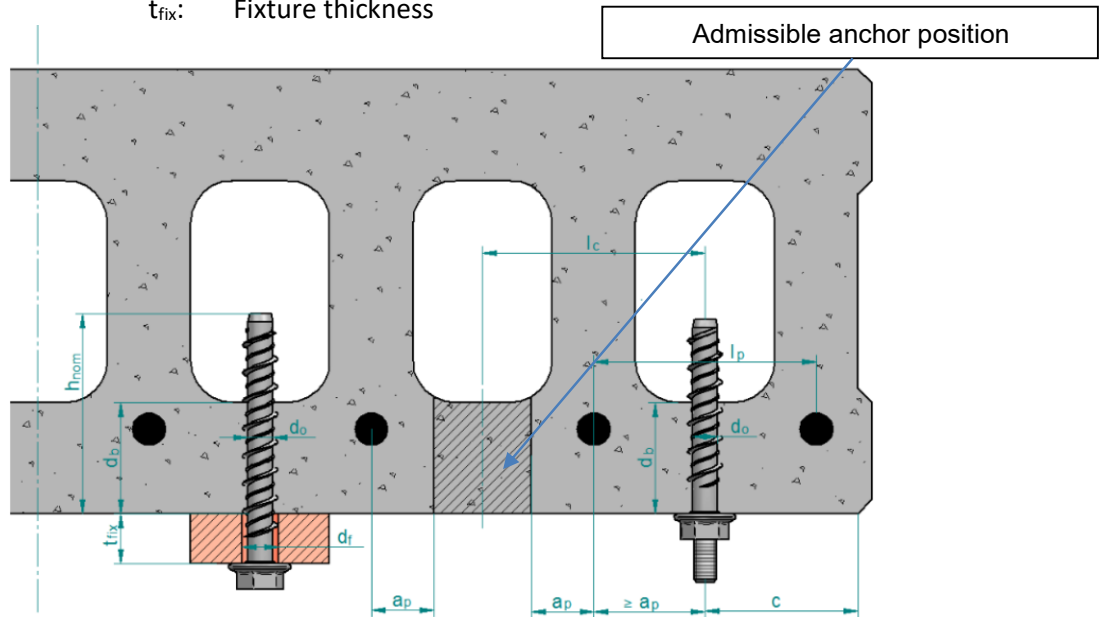

2.2. SEISMIC LOAD ASSESSMENT

Family	Code	Size (Letter)	Assessed	C1	C2	Family	Code	Size (Letter)	Assessed	C1	C2
[--]	[--]	[--]	ETA	[--]	[--]	[--]	[--]	[--]	ETA	[--]	[--]
THE	THE05040	Ø5 x 40 (A)	✓*	--	--	THE	THE16100	Ø16 x 100	✓	--	--
	THE05050	Ø5 x 50 (A)	✓*	--	--		THE16150	Ø16 x 150	✓	--	--
	THE05060	Ø5 x 60 (B)	✓*	--	--		THE18100	Ø18 x 100	✓	--	--
	THE05080	Ø5 x 80 (D)	✓*	--	--		THE18130	Ø18 x 130	✓	--	--
	THE05100	Ø5 x 100 (E)	✓*	--	--		THE18160	Ø18 x 160	✓	✓	✓
	THE06035	Ø6 x 35	✓	--	--		THE18180	Ø18 x 180	✓	✓	✓
	THE06040	Ø6 x 40	✓	--	--		THE18200	Ø18 x 200	✓	✓	✓
	THE06045	Ø6 x 45	✓	--	--		THA05040	Ø5 x 40 (A)	✓*	--	--
	THE06050	Ø6 x 50	✓	--	--		THA05060	Ø5 x 60 (B)	✓*	--	--
	THE06060	Ø6 x 60	✓	✓	--		THA05080	Ø5 x 80 (D)	✓*	--	--
	THE06070	Ø6 x 70	✓	✓	--		THA05100	Ø5 x 100 (E)	✓*	--	--
	THE06080	Ø6 x 80	✓	✓	--		THA06045	Ø6 x 45	✓	--	--
	THE06100	Ø6 x 100	✓	✓	--	THA06050	Ø6 x 50	✓	--	--	
	THE06120	Ø6 x 120	✓	✓	--	THA06060	Ø6 x 60	✓	✓	--	
	THE08055	Ø8 x 55	✓	✓	✓	THA06080	Ø6 x 80	✓	✓	--	
	THE08060	Ø8 x 60	✓	✓	✓	THA06100	Ø6 x 100	✓	✓	--	
	THE08070	Ø8 x 70	✓	✓	✓	THA06120	Ø6 x 120	✓	✓	--	
	THE08075	Ø8 x 75	✓	✓	✓	THA06140	Ø6 x 140	✓	✓	--	
	THE08080	Ø8 x 80	✓	✓	✓	THA08060	Ø8 x 60	✓	✓	✓	
	THE08090	Ø8 x 90	✓	✓	✓	THA08080	Ø8 x 80	✓	✓	✓	
	THE08100	Ø8 x 100	✓	✓	✓	THA08100	Ø8 x 100	✓	✓	✓	
	THE08110	Ø8 x 110	✓	✓	✓	THA08120	Ø8 x 120	✓	✓	✓	
	THE08120	Ø8 x 120	✓	✓	✓	THA10100	Ø10 x 100	✓	✓	✓	
	THE08140	Ø8 x 140	✓	✓	✓	THA10120	Ø10 x 120	✓	✓	✓	
	THE10060	Ø10 x 60	✓	--	--	THT06040	Ø6 x 40	✓	--	--	
	THE10070	Ø10 x 70	✓	--	--	THT06050	Ø6 x 50	✓	--	--	
	THE10080	Ø10 x 80	✓	--	--	THT06060	Ø6 x 60	✓	✓	--	
	THE10090	Ø10 x 90	✓	✓	✓	THP05040	Ø5 x 40 (A)	✓*	--	--	
	THE10100	Ø10 x 100	✓	✓	✓	THP05060	Ø5 x 60 (B)	✓*	--	--	
	THE10120	Ø10 x 120	✓	✓	✓	THP06040	Ø6 x 40	✓	--	--	
	THE10140	Ø10 x 140	✓	✓	✓	THP06050	Ø6 x 50	✓	--	--	
	THE10160	Ø10 x 160	✓	✓	✓	THP06060	Ø6 x 60	✓	✓	--	
	THE10180	Ø10 x 180	✓	✓	✓	THP06080	Ø6 x 80	✓	✓	--	
	THE12080	Ø12 x 80	✓	--	--	THP06100	Ø6 x 100	✓	✓	--	
	THE12090	Ø12 x 90	✓	--	--	THP08060	Ø8 x 60	✓	✓	✓	
	THE12100	Ø12 x 100	✓	--	--	THP08080	Ø8 x 80	✓	✓	✓	
	THE12110	Ø12 x 110	✓	✓	✓						
	THE12130	Ø12 x 130	✓	✓	✓						
	THE12150	Ø12 x 150	✓	✓	✓						
	THE14080	Ø14 x 80	✓	--	--						
	THE14100	Ø14 x 100	✓	--	--						
	THE14110	Ø14 x 110	✓	--	--						
THE14120	Ø14 x 120	✓	✓	✓							
THE14130	Ø14 x 130	✓	✓	✓							
THE14140	Ø14 x 140	✓	✓	✓							
THE14160	Ø14 x 160	✓	✓	✓							

## 3. INSTALLATION PARAMETERS (CONCRETE)

General Installation parameters										Standard Installation depth ( $h_{ef, std}$ )								Reduced Installation depth ( $h_{ef, red}$ )										
Family	Code	Size (Letter)	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	
[--]	[--]	[--]	ETA	$d_0$ [mm]	$d_f$ [mm]	SW/Tx [--]	$T_{inst}$ [Nm]	$S_{min}$ [mm]	$C_{min}$ [mm]	$h_{min}$ [mm]	$h_1$ [mm]	$h_{nom}$ [mm]	$h_{ef}$ [mm]	$t_{fix}$ [mm]	$S_{cr,N}$ [mm]	$C_{cr,N}$ [mm]	$S_{cr,sp}$ [mm]	$C_{cr,sp}$ [mm]	$h_{min}$ [mm]	$h_1$ [mm]	$h_{nom}$ [mm]	$h_{ef}$ [mm]	$t_{fix}$ [mm]	$S_{cr,N}$ [mm]	$C_{cr,N}$ [mm]	$S_{cr,sp}$ [mm]	$C_{cr,sp}$ [mm]	
THE	THE05040	Ø5 x 40(A)	✓*	5	6,5 - 8	SW 8	8	35	35	--	--	--	--	--	--	--	--	--	80	45	35	26,5	5	80	40	80	40	
	THE05050	Ø5 x 50(A)	✓*			SW 8				5	105	53	105	53	15													
	THE05060	Ø5 x 60(B)	✓*			SW 8				15	105	53	105	53	35													
	THE05080	Ø5 x 80(D)	✓*			SW 8				35	105	53	105	53	45													
	THE05100	Ø5 x 100(E)	✓*			SW 8				55	105	53	105	53	65													
	THE06035	Ø6 x 35	✓	6	7,5 - 9	SW 10	10	35	35	--	--	--	--	--	--	--	--	--	--	100	45	35	26,0	5	78	39	90	45
	THE06040	Ø6 x 40	✓			SW 10				5	--	--	--															
	THE06045	Ø6 x 45	✓			SW 10				10	--	--	--															
	THE06050	Ø6 x 50	✓			SW 10				15	--	--	--															
	THE06060	Ø6 x 60	✓			SW 10				25	129	65	170	85	35													
	THE06070	Ø6 x 70	✓			SW 10				45	--	--	--															
	THE06080	Ø6 x 80	✓			SW 10				65	--	--	--															
	THE06100	Ø6 x 100	✓			SW 10				85	--	--	--															
	THE06120	Ø6 x 120	✓			SW 10				100	65	55	43,0	25	129	65	170	85	45									
	THE08055	Ø8 x 55	✓			SW 13				5	--	--	--	--	--	--	--	--	5									
	THE08060	Ø8 x 60	✓			SW 13				10	--	--	--	--	--	--	--	--	10									
	THE08070	Ø8 x 70	✓			SW 13				20	100	75	65	50,5	25	152	76	200	100									
	THE08075	Ø8 x 75	✓	SW 13	25	100	75	65	50,5	35	152	76	200	100	25													
	THE08080	Ø8 x 80	✓	SW 13	30	100	75	65	50,5	45	152	76	200	100	30													
	THE08090	Ø8 x 90	✓	SW 13	40	100	75	65	50,5	55	152	76	200	100	40													
	THE08100	Ø8 x 100	✓	SW 13	50	100	75	65	50,5	60	152	76	200	100	50													
	THE08110	Ø8 x 110	✓	SW 13	60	100	75	65	50,5	70	152	76	200	100	60													
	THE08120	Ø8 x 120	✓	SW 13	70	100	75	65	50,5	75	152	76	200	100	70													
	THE08140	Ø8 x 140	✓	SW 13	85	100	75	65	50,5	90	152	76	200	100	85													

\*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

General Installation parameters										Standard Installation depth ( $h_{ef, std}$ )								Reduced Installation depth ( $h_{ef, red}$ )										
Family	Code	Size (Letter)	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	
[--]	[--]	[--]	ETA	$d_o$	$d_f$	SW/Tx	$T_{inst}$	$S_{min}$	$C_{min}$	$h_{min}$	$h_1$	$h_{nom}$	$h_{ef}$	$t_{fix}$	$S_{cr,N}$	$C_{cr,N}$	$S_{cr,sp}$	$C_{cr,sp}$	$h_{min}$	$h_1$	$h_{nom}$	$h_{ef}$	$t_{fix}$	$S_{cr,N}$	$C_{cr,N}$	$S_{cr,sp}$	$C_{cr,sp}$	
				[mm]	[mm]	[--]	[Nm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
THE	THE10060	Ø10 x 60	✓	10	12,5 - 14	SW 15	30	50	40	--	--	--	--	--	--	--	--	--	100	65	55	41,5	5	125	63	140	70	
	THE10070	Ø10 x 70	✓			15																						
	THE10080	Ø10 x 80	✓			25																						
	THE10090	Ø10 x 90	✓			35																						
	THE10100	Ø10 x 100	✓			5																						
	THE10120	Ø10 x 120	✓			15																						
	THE10140	Ø10 x 140	✓			35																						
	THE10160	Ø10 x 160	✓			55																						
	THE10180	Ø10 x 180	✓			75																						
	THE12080	Ø12 x 80	✓	12	14,8 - 16	SW 15	50	75	45	95	135	95	85	67,0	95	201	101	210	105	120	90	75	58,0	105	174	87	190	95
	THE12090	Ø12 x 90	✓			15																						
	THE12100	Ø12 x 100	✓			25																						
	THE12110	Ø12 x 110	✓			35																						
	THE12130	Ø12 x 130	✓			5																						
	THE12150	Ø12 x 150	✓			15																						
	THE14080	Ø14 x 80	✓	14	16,9 - 18	SW 18	70	80	50	--	185	130	115	92,0	--	276	138	230	115	120	90	75	58,0	5	174	87	190	95
	THE14100	Ø14 x 100	✓			15																						
	THE14110	Ø14 x 110	✓			25																						
	THE14120	Ø14 x 120	✓			35																						
	THE14130	Ø14 x 130	✓			5																						
	THE14140	Ø14 x 140	✓			15																						
	THE14160	Ø14 x 160	✓	25																								
	THE16100	Ø16 x 100	✓	16	18,9 - 20	SW 21	80	80	50	--	185	120	120	92	--	276	138	280	140	115	100	80	58	20	174	87	180	90
	THE16150	Ø16 x 150	✓			70																						
THE18100	Ø18 x 100	✓	18	20,9 - 22	SW 18	90	90	55	--	225	160	140	112,0	--	336	168	350	175	140	110	90	69,5	10	209	105	230	115	
THE18130	Ø18 x 130	✓			40																							
THE18160	Ø18 x 160	✓			70																							
THE18180	Ø18 x 180	✓			90																							
THE18200	Ø18 x 200	✓			110																							

General Installation parameters										Standard Installation depth ( $h_{ef, std}$ )								Reduced Installation depth ( $h_{ef, red}$ )										
Family	Code	Size (Letter)	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	
[--]	[--]	[--]	ETA	$d_0$	$d_f$	SW/Tx	$T_{inst}$	$S_{min}$	$C_{min}$	$h_{min}$	$h_1$	$h_{nom}$	$h_{ef}$	$t_{fix}$	$S_{cr,N}$	$C_{cr,N}$	$S_{cr,sp}$	$C_{cr,sp}$	$h_{min}$	$h_1$	$h_{nom}$	$h_{ef}$	$t_{fix}$	$S_{cr,N}$	$C_{cr,N}$	$S_{cr,sp}$	$C_{cr,sp}$	
				[mm]	[mm]	[--]	[Nm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
THA	THA05040	Ø5 x 40(A)	✓*	5	6,5 - 8	TX25	8	35	35	80	55	45	35,0	--	105	53	105	53	80	45	35	26,5	5	80	40	80	40	
	THA05060	Ø5 x 60(B)	✓*			15								25														
	THA05080	Ø5 x 80(D)	✓*			35								45														
	THA05100	Ø5 x 100(E)	✓*			55								65														
	THA06045	Ø6 x 45	✓	6	7,5 - 9	TX30	10	35	35	--	100	65	55	43,0	129	65	170	85	100	45	35	26,0	10	78	39	90	45	
	THA06050	Ø6 x 50	✓			15																						
	THA06060	Ø6 x 60	✓			5				25																		
	THA06080	Ø6 x 80	✓			25				45																		
	THA06100	Ø6 x 100	✓			45				65																		
	THA06120	Ø6 x 120	✓			65				85																		
	THA06140	Ø6 x 140	✓	85	105																							
	THA08060	Ø8 x 60	✓	8	10,5 - 12	TX45	20	35	35	--	100	75	65	50,5	--	152	76	200	100	100	60	50	37,5	10	113	57	130	65
	THA08080	Ø8 x 80	✓			15				30																		
	THA08100	Ø8 x 100	✓			35				50																		
THA08120	Ø8 x 120	✓	55			70																						
THA10100	Ø10 x 100	✓	10	12,5 - 14	TX50	30	50	40	135	95	85	67,0	15	201	101	210	105	100	65	55	41,5	45	125	63	140	70		
THA10120	Ø10 x 120	✓			35				65																			
THT	THT06040	Ø6 x 40	✓	6	7,5 - 9	TX30	10	35	35	--	100	65	55	43,0	--	129	65	170	85	100	45	35	26,0	5	78	39	90	45
	THT06050	Ø6 x 50	✓			15																						
	THT06060	Ø6 x 60	✓			25																						
THP	THP05040	Ø5 x 40(A)	✓*	5	6,5 - 8	TX30	8	35	35	--	80	55	45	35,0	--	105	53	105	53	80	45	35	26,5	5	80	40	80	40
	THP05060	Ø5 x 60(B)	✓*			15				25																		
	THP06040	Ø6 x 40	✓	6	7,5 - 9	TX40	10	35	35	--	100	65	55	43,0	--	129	65	170	85	100	45	35	26,0	5	78	39	90	45
	THP06050	Ø6 x 50	✓			15																						
	THP06060	Ø6 x 60	✓			25																						
	THP06080	Ø6 x 80	✓			45																						
	THP06100	Ø6 x 100	✓	65																								
THP08060	Ø8 x 60	✓	8	10,5 - 12	TX45	20	35	35	--	100	75	65	50,5	--	152	76	200	100	100	60	50	37,5	10	113	57	130	65	
THP08080	Ø8 x 80	✓			15				30																			

\*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

4. INSTALLATION PARAMETERS (HOLLOW CORE SLABS) [Installation depth reduced/intermediate/standard]

General Installation parameters											Installation depth ( $h_{ef1}/ h_{ef2}/ h_{ef3}$ )								
Family	Code	Size (Letter)	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Bottom flange thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	
[--]	[--]	[--]	ETA	$d_0$ [mm]	$d_f$ [mm]	SW/Tx [--]	$T_{inst}$ [Nm]	$S_{min}$ [mm]	$C_{min}$ [mm]	$d_b$ [mm]	$h_1$ [mm]	$h_{nom}$ [mm]	$h_{ef}$ [mm]	$t_{fix}$ [mm]	$S_{cr,N}$ [mm]	$C_{cr,N}$ [mm]	$S_{cr,sp}$ [mm]	$C_{cr,sp}$ [mm]	
THE	THE05040	Ø5 x 40(A)	✓*	5	6,5 - 8	SW 8	8	35	35	25/30/40	30/40/45	30/40/45	20/22/26,5	10/--/--	60/66/80	30/33/40	80	80	
	THE05050	Ø5 x 50(A)	✓*			20/10/5													
	THE05060	Ø5 x 60(B)	✓*			30/20/15													
	THE05080	Ø5 x 80(D)	✓*			50/40/35													
	THE05100	Ø5 x 100(E)	✓*			70/60/55													
	THE06035	Ø6 x 35	✓	6	7,5 - 9	SW 10	10	35	35	25/30/40	30/40/45	30/40/45	20/22/26	5/--/--	60/66/78	30/33/39	90	45	
	THE06040	Ø6 x 40	✓			10/--/--													
	THE06045	Ø6 x 45	✓			15/5/--													
	THE06050	Ø6 x 50	✓			20/10/5													
	THE06060	Ø6 x 60	✓			30/20/15													
	THE06070	Ø6 x 70	✓			40/30/25													
	THE06080	Ø6 x 80	✓			50/40/35													
	THE06100	Ø6 x 100	✓			70/60/55													
	THE06120	Ø6 x 120	✓			90/80/75													
THA	THA05040	Ø5 x 40(A)	✓*	5	6,5 - 8	TX25	8	35	35	25/30/40	30/40/45	30/40/45	20/22/26,5	10/--/--	60/66/80	30/33/40	80	80	
	THA05060	Ø5 x 60(B)	✓*			30/20/15													
	THA05080	Ø5 x 80(D)	✓*			50/40/35													
	THA05100	Ø5 x 100(E)	✓*			70/60/55													
	THA06045	Ø6 x 45	✓	6	7,5 - 9	TX30	10	35	35	25/30/40	30/40/45	30/40/45	20/22/26	15/5/--	60/66/78	30/33/39	90	45	
	THA06050	Ø6 x 50	✓			20/10/5													
	THA06060	Ø6 x 60	✓			30/20/15													
	THA06080	Ø6 x 80	✓			50/40/35													
	THA06100	Ø6 x 100	✓			70/60/55													
	THA06120	Ø6 x 120	✓			90/80/75													
	THA06140	Ø6 x 140	✓			110/100/95													

\*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems




General Installation parameters										Installation depth (h <sub>ef1</sub> / h <sub>ef2</sub> / h <sub>ef3</sub> )								
Family	Code	Size (Letter)	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Bottom flange thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)
				d <sub>0</sub>	d <sub>f</sub>													
[--]	[--]	[--]	ETA	[mm]	[mm]	[--]	[Nm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
THT	THTO6040	∅6 x 40	✓	6	7,5 - 9	TX30	10	35	35	25/30/40	30/40/45	30/40/45	20/22/26	10/--/--	60/66/78	30/33/39	90	45
	THTO6050	∅6 x 50	✓			TX30								20/10/5				
	THTO6060	∅6 x 60	✓			TX30								30/20/15				
THP	THPO5040	∅5 x 40(A)	✓*	5	6,5 - 8	TX30	8	35	35	25/30/40	30/40/45	30/40/45	20/22/26,5	10/--/--	60/66/80	30/33/40	80	80
	THPO5060	∅5 x 60(B)	✓*			TX30								30/20/15				
	THPO6040	∅6 x 40	✓	6	7,5 - 9	TX40	10	35	35	25/30/40	30/40/45	30/40/45	20/22/26	10/--/--	60/66/78	30/33/39	90	45
	THPO6050	∅6 x 50	✓			TX40								20/10/5				
	THPO6060	∅6 x 60	✓			TX40								30/20/15				
	THPO6080	∅6 x 80	✓			TX40								50/40/35				
	THPO6100	∅6 x 100	✓			TX40								70/60/55				

\*∅5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

**5. INSTALLATION PROCEDURE**

**5.1. CONCRETE AND HOLLOW CORE INSTALLATION**

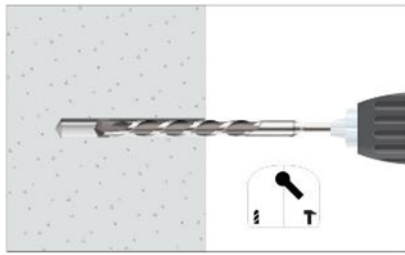


**1. DRILLING**

Check the concrete is well compacted and without significant porosity. Suitable for dry, wet and flooded holes. Use drill in hammer mode. Drill according to specified depths in previous tables.




**2. BLOW AND CLEAN**

Clean the hole from dust and concrete remains. Use blow pump and brush.

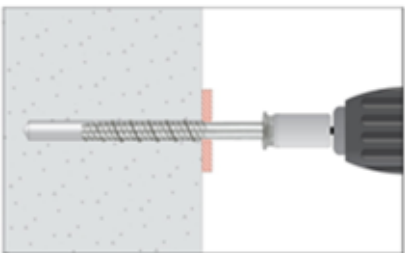

**3. INSTALL**

Select a powered impact wrench or a torque wrench that does not exceed the maximum torque indicated in previous tables. Attach an appropriate size hex socket to the wrench. Mount the screw anchor head in the socket.

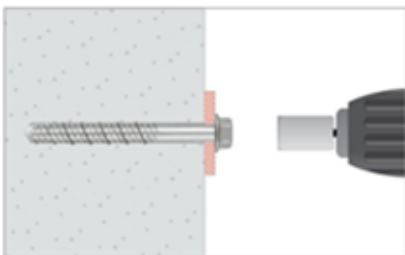

**4. APPLY THE TORQUE**

Drive the anchor with an impact driver or a torque wrench through the fixture and into the hole until the anchor head washer comes in contact with the fixture. The anchor must be snug after installation. Do not spin the hex socket off the anchor to disengage.

### 6. RESISTANCES (CONCRETE)

Resistances in concrete class C20/25 for an isolated anchor without spacing or concrete edge distance effects are indicated in the following table:

Values underlined and in italics show Steel failure, **bold** values concrete failure and other indicate pull out failure.  
1 KN ≈ 100 kg

#### 6.1 CHARACTERISTIC RESISTANCE (STRUCTURAL APPLICATION) [kN]

General Parameter				Non-cracked concrete				Cracked concrete				
Family	Code	Size	ETA Assessed	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		
				( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	
THE	THE05040	Ø5 x 40	✓*	--	<b>6,71</b>	--	<b>6,71</b>	--	<b>4,70</b>	--	<b>4,70</b>	
	THE05050	Ø5 x 50	✓*	<b>10,19</b>	<b>6,71</b>	<u><i>8,19</i></u>	<b>6,71</b>	<b>7,13</b>	<b>4,70</b>	<b>7,13</b>	<b>4,70</b>	
	THE05060	Ø5 x 60	✓*									
	THE05080	Ø5 x 80	✓*									
	THE05100	Ø5 x 100	✓*									
	THE06035	Ø6 x 35	✓	--	5,00	--	<u><i>12,53</i></u>	--	<b>4,57</b>	--	--	
	THE06040	Ø6 x 40	✓									
	THE06045	Ø6 x 45	✓									
	THE06050	Ø6 x 50	✓									
	THE06060	Ø6 x 60	✓	<b>13,87</b>	5,00	<u><i>12,53</i></u>	<u><i>12,53</i></u>	<b>9,71</b>	<b>4,57</b>	<b>11,17</b>	<b>9,36</b>	
	THE06070	Ø6 x 70	✓									
	THE06080	Ø6 x 80	✓									
	THE06100	Ø6 x 100	✓									
	THE06120	Ø6 x 120	✓									
	THE08055	Ø8 x 55	✓									--
	THE08060	Ø8 x 60	✓									
	THE08070	Ø8 x 70	✓	<b>17,65</b>	<b>11,30</b>	<u><i>19,57</i></u>	<u><i>19,57</i></u>	<b>12,36</b>	<b>7,91</b>	<b>15,69</b>	<b>14,23</b>	
	THE08075	Ø8 x 75	✓									
	THE08080	Ø8 x 80	✓									
	THE08090	Ø8 x 90	✓									
	THE08100	Ø8 x 100	✓									
	THE08110	Ø8 x 110	✓									
	THE08120	Ø8 x 120	✓									
	THE08140	Ø8 x 140	✓									
	THE10060	Ø10 x 60	✓	--	<b>13,15</b>	--	<b>25,65</b>	--	<b>9,21</b>	--	<b>17,95</b>	
	THE10070	Ø10 x 70	✓									
	THE10080	Ø10 x 80	✓									
	THE10090	Ø10 x 90	✓									
	THE10100	Ø10 x 100	✓	<b>26,98</b>	<b>13,15</b>	<u><i>27,40</i></u>	<b>25,65</b>	<b>18,89</b>	<b>9,21</b>	<u><i>27,40</i></u>	<b>17,95</b>	
	THE10120	Ø10 x 120	✓									
	THE10140	Ø10 x 140	✓									
	THE10160	Ø10 x 160	✓									
	THE10180	Ø10 x 180	✓									
	THE12080	Ø12 x 80	✓									--
	THE12090	Ø12 x 90	✓									
	THE12100	Ø12 x 100	✓	--	<b>37,54</b>	<b>21,73</b>	<u><i>37,24</i></u>	<u><i>37,24</i></u>	<b>26,27</b>	<b>15,21</b>	<u><i>37,24</i></u>	<b>35,44</b>
	THE12110	Ø12 x 110	✓									
	THE12130	Ø12 x 130	✓									
	THE12150	Ø12 x 150	✓									
	THE14080	Ø14 x 80	✓	--	<b>21,73</b>	--	<u><i>52,72</i></u>	--	<b>15,21</b>	--	<b>38,79</b>	
THE14100	Ø14 x 100	✓										
THE14110	Ø14 x 110	✓										
THE14120	Ø14 x 120	✓										
THE14130	Ø14 x 130	✓	<b>43,41</b>	<b>21,73</b>	<u><i>52,72</i></u>	<u><i>52,72</i></u>	<b>30,39</b>	<b>15,21</b>	<u><i>52,72</i></u>	<b>38,79</b>		
THE14140	Ø14 x 140	✓										
THE14160	Ø14 x 160	✓										
TFE16100	Ø16 x 100	✓									--	<b>43,41</b>
TFE16150	Ø16 x 150	✓										
THE18100	Ø18 x 100	✓	--	<b>28,50</b>	--	<b>75,82</b>	--	<b>19,95</b>	--	<b>53,07</b>		
THE18130	Ø18 x 130	✓										
THE18160	Ø18 x 160	✓	<b>58,31</b>	<b>28,50</b>	<u><i>80,78</i></u>	<b>75,82</b>	<b>40,82</b>	<b>19,95</b>	<u><i>80,78</i></u>	<b>53,07</b>		
THE18180	Ø18 x 180	✓										
THE18200	Ø18 x 200	✓										

\*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$	
				( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )
THA	THA05040	Ø5 x 40	✓*	--	<b>6,71</b>	--	<b>6,71</b>	--	<b>4,70</b>	--	<b>4,70</b>
	THA05060	Ø5 x 60	✓*	<b>10,19</b>	<b>6,71</b>	<u>8,19</u>	<b>6,71</b>	<b>7,13</b>	<b>4,70</b>	<b>7,13</b>	<b>4,70</b>
	THA05080	Ø5 x 80	✓*								
	THA05100	Ø5 x 100	✓*								
	THA06045	Ø6 x 45	✓	--	5,00	--	<u>12,53</u>	--	<b>4,57</b>	--	<b>9,36</b>
	THA06050	Ø6 x 50	✓								
	THA06060	Ø6 x 60	✓	<b>13,87</b>	5,00	<u>12,53</u>	<u>12,53</u>	<b>9,71</b>	<b>4,57</b>	<b>11,17</b>	<b>9,36</b>
	THA06080	Ø6 x 80	✓								
	THA06100	Ø6 x 100	✓								
	THA06120	Ø6 x 120	✓								
	THA06140	Ø6 x 140	✓	<b>17,65</b>	<b>11,30</b>	<u>19,57</u>	<u>19,57</u>	<b>12,36</b>	<b>7,91</b>	<b>15,69</b>	<b>14,23</b>
	THA08060	Ø8 x 60	✓								
	THA08080	Ø8 x 80	✓								
	THA08100	Ø8 x 100	✓								
THA08120	Ø8 x 120	✓									
THA10100	Ø10 x 100	✓									
THA10120	Ø10 x 120	✓	<b>26,98</b>	<b>13,15</b>	<u>27,40</u>	<b>25,65</b>	<b>18,89</b>	<b>9,21</b>	<u>27,40</u>	<b>17,95</b>	
THT	THT06040	Ø6 x 40	✓	--	5,00	--	<u>12,53</u>	--	<b>4,57</b>	--	<b>9,36</b>
	THT06050	Ø6 x 50	✓								
	THT06060	Ø6 x 60	✓	<b>13,87</b>	5,00	<u>12,53</u>	<u>12,53</u>	<b>9,71</b>	<b>4,57</b>	<b>11,17</b>	<b>9,36</b>
THP	THP05040	Ø5 x 40	✓*	--	<b>6,71</b>	--	<b>6,71</b>	--	<b>4,70</b>	--	<b>4,70</b>
	THP05060	Ø5 x 60	✓*	<b>10,19</b>	<b>6,71</b>	<u>8,19</u>	<b>6,71</b>	<b>7,13</b>	<b>4,70</b>	<b>7,13</b>	<b>4,70</b>
	THP06040	Ø6 x 40	✓								
	THP06050	Ø6 x 50	✓								
	THP06060	Ø6 x 60	✓	<b>13,87</b>	5,00	<u>12,53</u>	<u>12,53</u>	<b>9,71</b>	<b>4,57</b>	<b>11,17</b>	<b>9,36</b>
	THP06080	Ø6 x 80	✓								
	THP06100	Ø6 x 100	✓								
	THP08060	Ø8 x 60	✓								
THP08080	Ø8 x 80	✓	<b>17,65</b>	<b>11,30</b>	<u>19,57</u>	<u>19,57</u>	<b>12,36</b>	<b>7,91</b>	<b>15,69</b>	<b>14,23</b>	

\*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

6.2 DESIGN RESISTANCE (STRUCTURAL APPLICATION) [kN]

General Parameter				Non-cracked concrete				Cracked concrete							
Family	Code	Size	ETA Assessed	Tension $N_{Rd, ucr}$		Shear $V_{Rd, ucr}$		Tension $N_{Rd, cr}$		Shear $V_{Rd, cr}$					
				( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )				
THE	THE05040	Ø5 x 40	✓*	--	4,47	--	4,47	--	3,13	--	3,13				
	THE05050	Ø5 x 50	✓*	6,79	4,47	<u>5,46</u>	4,47	4,75	3,13	4,75	3,13				
	THE05060	Ø5 x 60	✓*												
	THE05080	Ø5 x 80	✓*												
	THE05100	Ø5 x 100	✓*												
	THE06035	Ø6 x 35	✓	--	2,78	--	<u>8,35</u>	--	2,54	--	6,24				
	THE06040	Ø6 x 40	✓	--		--									
	THE06045	Ø6 x 45	✓	--		--									
	THE06050	Ø6 x 50	✓	--		--									
	THE06060	Ø6 x 60	✓	9,25	2,78	<u>8,35</u>	<u>8,35</u>	6,47	2,54	7,44	6,24				
	THE06070	Ø6 x 70	✓												
	THE06080	Ø6 x 80	✓												
	THE06100	Ø6 x 100	✓												
	THE06120	Ø6 x 120	✓	11,77	6,28	<u>13,05</u>	<u>13,05</u>	8,24	4,39	10,46	9,49				
	THE08055	Ø8 x 55	✓												
	THE08060	Ø8 x 60	✓												
	THE08070	Ø8 x 70	✓												
	THE08075	Ø8 x 75	✓	11,77	6,28	<u>13,05</u>	<u>13,05</u>	8,24	4,39	10,46	9,49				
	THE08080	Ø8 x 80	✓												
	THE08090	Ø8 x 90	✓												
	THE08100	Ø8 x 100	✓												
	THE08110	Ø8 x 110	✓	17,99	8,77	<u>18,27</u>	17,10	12,59	6,14	<u>18,27</u>	11,97				
	THE08120	Ø8 x 120	✓												
	THE08140	Ø8 x 140	✓												
	THE10060	Ø10 x 60	✓												
	THE10070	Ø10 x 70	✓	--	8,77	--	17,10	--	6,14	--	11,97				
	THE10080	Ø10 x 80	✓	--		--									
	THE10090	Ø10 x 90	✓	17,99		8,77		<u>18,27</u>		17,10		12,59	6,14	<u>18,27</u>	11,97
	THE10100	Ø10 x 100	✓												
	THE10120	Ø10 x 120	✓												
	THE10140	Ø10 x 140	✓												
	THE10160	Ø10 x 160	✓	25,02	14,49	<u>24,83</u>	<u>24,83</u>	17,52	10,14	<u>24,83</u>	23,63				
THE10180	Ø10 x 180	✓													
THE12080	Ø12 x 80	✓													
THE12090	Ø12 x 90	✓													
THE12100	Ø12 x 100	✓	--	14,49	--	<u>24,83</u>	--	10,14	--	23,63					
THE12110	Ø12 x 110	✓	--		--										
THE12130	Ø12 x 130	✓	25,02		14,49		<u>24,83</u>		<u>24,83</u>		17,52	10,14	<u>24,83</u>	23,63	
THE12150	Ø12 x 150	✓													
THE14080	Ø14 x 80	✓													
THE14100	Ø14 x 100	✓													
THE14110	Ø14 x 110	✓	--	21,73	--	<u>52,72</u>	--	15,21	--	38,79					
THE14120	Ø14 x 120	✓	--		--										
THE14130	Ø14 x 130	✓	43,41		21,73		<u>52,72</u>		<u>52,72</u>		30,39	15,21	<u>52,72</u>	38,79	
THE14140	Ø14 x 140	✓													
THE14160	Ø14 x 160	✓													
TFE16100	Ø16 x 100	✓		--		--		--		--					20,26
TFE16150	Ø16 x 150	✓	28,94	14,49	<u>38,65</u>	31,00									
THE18100	Ø18 x 100	✓	--	19,00	--	50,54	--	13,30	--	35,38					
THE18130	Ø18 x 130	✓	--		--										
THE18160	Ø18 x 160	✓	38,87	19,00	<u>53,85</u>	50,54	27,21	13,30	<u>53,85</u>	35,38					
THE18180	Ø18 x 180	✓													
THE18200	Ø18 x 200	✓													

\*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{Rd, ucr}$		Shear $V_{Rd, ucr}$		Tension $N_{Rd, cr}$		Shear $V_{Rd, cr}$	
				( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )
THA	THA05040	Ø5 x 40	✓*	--	<b>4,47</b>	--	<b>4,47</b>	--	<b>3,13</b>	--	<b>3,13</b>
	THA05060	Ø5 x 60	✓*	<b>6,79</b>	<b>4,47</b>	<u>5,46</u>	<b>4,47</b>	<b>4,75</b>	<b>3,13</b>	<b>4,75</b>	<b>3,13</b>
	THA05080	Ø5 x 80	✓*								
	THA05100	Ø5 x 100	✓*								
	THA06045	Ø6 x 45	✓	--	2,78	--	<u>8,35</u>	--	<b>2,54</b>	--	<b>6,24</b>
	THA06050	Ø6 x 50	✓								
	THA06060	Ø6 x 60	✓	<b>9,25</b>	2,78	<u>8,35</u>	<u>8,35</u>	<b>6,47</b>	<b>2,54</b>	<b>7,44</b>	<b>6,24</b>
	THA06080	Ø6 x 80	✓								
	THA06100	Ø6 x 100	✓								
	THA06120	Ø6 x 120	✓								
	THA06140	Ø6 x 140	✓	<b>11,77</b>	<b>6,28</b>	<u>13,05</u>	<u>13,05</u>	<b>8,24</b>	<b>4,39</b>	<b>10,46</b>	<b>9,49</b>
	THA08060	Ø8 x 60	✓								
	THA08080	Ø8 x 80	✓								
	THA08100	Ø8 x 100	✓								
THA08120	Ø8 x 120	✓									
THA10100	Ø10 x 100	✓	<b>17,99</b>	<b>8,77</b>	<u>18,27</u>	<b>17,10</b>	<b>12,59</b>	<b>6,14</b>	<u>18,27</u>	<b>11,97</b>	
THA10120	Ø10 x 120	✓									
THT	THT06040	Ø6 x 40	✓	--	2,78	--	<u>8,35</u>	--	<b>2,54</b>	--	<b>6,24</b>
	THT06050	Ø6 x 50	✓								
	THT06060	Ø6 x 60	✓	<b>9,25</b>	2,78	<u>8,35</u>	<u>8,35</u>	<b>6,47</b>	<b>2,54</b>	<b>7,44</b>	<b>6,24</b>
THP	THP05040	Ø5 x 40	✓*	--	<b>4,47</b>	--	<b>4,47</b>	--	<b>3,13</b>	--	<b>3,13</b>
	THP05060	Ø5 x 60	✓*	<b>6,79</b>	<b>4,47</b>	<u>5,46</u>	<b>4,47</b>	<b>4,75</b>	<b>3,13</b>	<b>4,75</b>	<b>3,13</b>
	THP06040	Ø6 x 40	✓								
	THP06050	Ø6 x 50	✓								
	THP06060	Ø6 x 60	✓	<b>9,25</b>	2,78	<u>8,35</u>	<u>8,35</u>	<b>6,47</b>	<b>2,54</b>	<b>7,44</b>	<b>6,24</b>
	THP06080	Ø6 x 80	✓								
	THP06100	Ø6 x 100	✓								
	THP08060	Ø8 x 60	✓								
THP08080	Ø8 x 80	✓	<b>11,77</b>	<b>6,28</b>	<u>13,05</u>	<u>13,05</u>	<b>8,24</b>	<b>4,39</b>	<b>10,46</b>	<b>9,49</b>	

\*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

**6.3 MAXIMUM RECOMMENDED LOADS (STRUCTURAL APPLICATION) [kN] (with  $\gamma_F= 1.4$  )**

General Parameter				Non-cracked concrete				Cracked concrete										
Family	Code	Size	ETA Assessed	Tension $N_{rec, ucr}$		Shear $V_{rec, ucr}$		Tension $N_{rec, cr}$		Shear $V_{rec, cr}$								
				( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )							
THE	THE05040	Ø5 x 40	✓*	--	3,20	--	3,20	--	2,24	--	2,24							
	THE05050	Ø5 x 50	✓*	4,85	3,20	<u>3,90</u>	3,20	3,40	2,24	3,40	2,24							
	THE05060	Ø5 x 60	✓*															
	THE05080	Ø5 x 80	✓*															
	THE05100	Ø5 x 100	✓*															
	THE06035	Ø6 x 35	✓	--	1,98	--	<u>5,97</u>	--	1,81	--	4,46							
	THE06040	Ø6 x 40	✓	--		--												
	THE06045	Ø6 x 45	✓	--		--												
	THE06050	Ø6 x 50	✓	--		--												
	THE06060	Ø6 x 60	✓	6,61	1,98	<u>5,97</u>	<u>5,97</u>	4,62	1,81	5,32	4,46							
	THE06070	Ø6 x 70	✓															
	THE06080	Ø6 x 80	✓															
	THE06100	Ø6 x 100	✓															
	THE06120	Ø6 x 120	✓	8,41	4,48	<u>9,32</u>	<u>9,32</u>	5,88	3,14	7,47	6,78							
	THE08055	Ø8 x 55	✓															
	THE08060	Ø8 x 60	✓															
	THE08070	Ø8 x 70	✓															
	THE08075	Ø8 x 75	✓	8,41	4,48	<u>9,32</u>	<u>9,32</u>	5,88	3,14	7,47	6,78							
	THE08080	Ø8 x 80	✓															
	THE08090	Ø8 x 90	✓															
	THE08100	Ø8 x 100	✓															
	THE08110	Ø8 x 110	✓	8,41	4,48	<u>9,32</u>	<u>9,32</u>	5,88	3,14	7,47	6,78							
	THE08120	Ø8 x 120	✓															
	THE08140	Ø8 x 140	✓															
	THE10060	Ø10 x 60	✓									--	6,26	--	12,21	--	4,38	--
	THE10070	Ø10 x 70	✓	--	--													
	THE10080	Ø10 x 80	✓	--	--													
	THE10090	Ø10 x 90	✓	12,85	6,26	<u>13,05</u>	12,21	8,99	4,38	<u>13,05</u>	8,55							
	THE10100	Ø10 x 100	✓															
	THE10120	Ø10 x 120	✓															
	THE10140	Ø10 x 140	✓															
	THE10160	Ø10 x 160	✓	12,85	6,26	<u>13,05</u>	12,21	8,99	4,38	<u>13,05</u>	8,55							
THE10180	Ø10 x 180	✓																
THE12080	Ø12 x 80	✓	--									10,35	--	<u>17,73</u>	--	7,24	--	16,88
THE12090	Ø12 x 90	✓	--										--					
THE12100	Ø12 x 100	✓	--	--														
THE12110	Ø12 x 110	✓	17,87	10,35	<u>17,73</u>	<u>17,73</u>	12,51	7,24	<u>17,73</u>	16,88								
THE12130	Ø12 x 130	✓																
THE12150	Ø12 x 150	✓																
THE14080	Ø14 x 80	✓									--	10,35	--	<u>25,10</u>	--	7,24	--	18,47
THE14100	Ø14 x 100	✓	--	--														
THE14110	Ø14 x 110	✓	--	--														
THE14120	Ø14 x 120	✓	20,67	10,35	<u>25,10</u>	<u>25,10</u>	14,47	7,24	<u>25,10</u>	18,47								
THE14130	Ø14 x 130	✓																
THE14140	Ø14 x 140	✓																
THE14160	Ø14 x 160	✓																
TFE16100	Ø16 x 100	✓	--	--	--	--	14,47	7,24	<u>27,60</u>	15,50								
TFE16150	Ø16 x 150	✓	20,67	10,35	<u>27,60</u>	22,14	14,47	7,24	<u>27,60</u>	15,50								
THE18100	Ø18 x 100	✓	--	13,57	--	36,10	--	9,50	--	25,27								
THE18130	Ø18 x 130	✓	--		--													
THE18160	Ø18 x 160	✓	--		--													
THE18180	Ø18 x 180	✓	27,77		13,57		<u>38,47</u>		36,10		19,44	9,50	<u>38,47</u>	25,27				
THE18200	Ø18 x 200	✓																

\*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{rec, ucr}$		Shear $V_{rec, ucr}$		Tension $N_{rec, cr}$		Shear $V_{rec, cr}$	
				( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )
THA	THA05040	Ø5 x 40	✓*	--	3,20	--	3,20	--	2,24	--	2,24
	THA05060	Ø5 x 60	✓*	4,85	3,20	<u>3,90</u>	3,20	3,40	2,24	3,40	2,24
	THA05080	Ø5 x 80	✓*								
	THA05100	Ø5 x 100	✓*								
	THA06045	Ø6 x 45	✓	--	1,98	--	<u>5,97</u>	--	1,81	--	4,46
	THA06050	Ø6 x 50	✓								
	THA06060	Ø6 x 60	✓	6,61	1,98	<u>5,97</u>	<u>5,97</u>	4,62	1,81	5,32	4,46
	THA06080	Ø6 x 80	✓								
	THA06100	Ø6 x 100	✓								
	THA06120	Ø6 x 120	✓								
	THA06140	Ø6 x 140	✓								
	THA08060	Ø8 x 60	✓	--	4,48	--	<u>9,32</u>	--	3,14	--	6,78
	THA08080	Ø8 x 80	✓								
	THA08100	Ø8 x 100	✓	8,41	4,48	<u>9,32</u>	<u>9,32</u>	5,88	3,14	7,47	6,78
THA08120	Ø8 x 120	✓									
THA10100	Ø10 x 100	✓									
THA10120	Ø10 x 120	✓	12,85	6,26	<u>13,05</u>	12,21	8,99	4,38	<u>13,05</u>	8,55	
THT	THT06040	Ø6 x 40	✓	--	1,98	--	<u>5,97</u>	--	1,81	--	4,46
	THT06050	Ø6 x 50	✓								
	THT06060	Ø6 x 60	✓	6,61	1,98	<u>5,97</u>	<u>5,97</u>	4,62	1,81	5,32	4,46
THP	THP05040	Ø5 x 40	✓*	--	3,20	--	3,20	--	2,24	--	2,24
	THP05060	Ø5 x 60	✓*	4,85		3,20		<u>3,90</u>		3,20	
	THP06040	Ø6 x 40	✓								
	THP06050	Ø6 x 50	✓								
	THP06060	Ø6 x 60	✓	6,61	1,98	<u>5,97</u>	<u>5,97</u>	4,62	1,81	5,32	4,46
	THP06080	Ø6 x 80	✓								
	THP06100	Ø6 x 100	✓								
	THP08060	Ø8 x 60	✓	--	4,48	--	<u>9,32</u>	--	3,14	--	6,78
THP08080	Ø8 x 80	✓	8,41	4,48		<u>9,32</u>		<u>9,32</u>		5,88	

\*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

PULL OUT INCREASING FACTOR FOR TENSION LOADS IN HIGH RESISTANCE CONCRETE $\psi_c$															
Diameter	Ø5		Ø6		Ø8		Ø10			Ø12		Ø14		Ø18	
Installation depth	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, 1}$ )	( $h_{ef, 2}$ )	( $h_{ef, 3}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )	( $h_{ef, red}$ )	( $h_{ef, std}$ )
C30/37	1,00	1,00	1,16	1,22	1,21	1,22	1,22	1,17	1,22	1,16	1,22	1,21	1,20	1,22	1,17
C40/50	1,00	1,00	1,28	1,41	1,39	1,41	1,41	1,30	1,41	1,29	1,41	1,39	1,37	1,40	1,32
C50/60	1,00	1,00	1,39	1,58	1,54	1,58	1,58	1,42	1,58	1,40	1,58	1,55	1,51	1,57	1,42



### 7. RESISTANCES (HOLLOW CORE SLABS)

Resistances in hollow core slab class C30/37 for an isolated anchor without spacing or concrete edge distance effects are indicated in the following table:

Values underlined and in italics show Steel failure, **bold** values concrete failure and other indicate pull out failure.  
1 kN ≈ 100 kg

#### 7.1 CHARACTERISTIC RESISTANCE (NON-STRUCTURAL APPLICATION) [kN]

General Parameter				Hollow core slabs					
Family	Code	Size	ETA Assessed	Tension N <sub>Rk</sub>			Shear V <sub>Rk</sub>		
				(h <sub>ef1</sub> )	(h <sub>ef2</sub> )	(h <sub>ef3</sub> )	(h <sub>ef1</sub> )	(h <sub>ef2</sub> )	(h <sub>ef3</sub> )
THE	THE05040	Ø5 x 40	✓*	5,39	--	--	5,39	--	--
	THE05050	Ø5 x 50	✓*		--	--		--	--
	THE05060	Ø5 x 60	✓*		<b>6,22</b>	<b>8,22</b>		<b>6,22</b>	<i><b>8,19</b></i>
	THE05080	Ø5 x 80	✓*						
	THE05100	Ø5 x 100	✓*						
	THE06035	Ø6 x 35	✓	5,39	--	--	5,39	--	--
	THE06040	Ø6 x 40	✓		--	--		--	--
	THE06045	Ø6 x 45	✓		--	--		--	--
	THE06050	Ø6 x 50	✓		<b>6,22</b>	<b>7,99</b>		<b>6,22</b>	<b>7,99</b>
	THE06060	Ø6 x 60	✓						
	THE06070	Ø6 x 70	✓						
	THE06080	Ø6 x 80	✓						
	THE06100	Ø6 x 100	✓						
THE06120	Ø6 x 120	✓							
THA	THA05040	Ø5 x 40	✓*	5,39	--	--	5,39	--	--
	THA05060	Ø5 x 60	✓*		<b>6,22</b>	<b>8,22</b>		<b>6,22</b>	<i><b>8,19</b></i>
	THA05080	Ø5 x 80	✓*						
	THA05100	Ø5 x 100	✓*						
	THA06045	Ø6 x 45	✓	5,39	--	--	5,39	--	--
	THA06050	Ø6 x 50	✓		--	--		--	--
	THA06060	Ø6 x 60	✓		<b>6,22</b>	<b>7,99</b>		<b>6,22</b>	<b>7,99</b>
	THA06080	Ø6 x 80	✓						
	THA06100	Ø6 x 100	✓						
THA06120	Ø6 x 120	✓							
THA06140	Ø6 x 140	✓							
THT	THT06040	Ø6 x 40	✓	5,39	--	--	5,39	--	--
	THT06050	Ø6 x 50	✓		<b>6,22</b>	<b>7,99</b>		<b>6,22</b>	<b>7,99</b>
	THT06060	Ø6 x 60	✓						
THP	THP05040	Ø5 x 40	✓*	5,39	--	--	5,39	--	--
	THP05060	Ø5 x 60	✓*		<b>6,22</b>	<b>8,22</b>		<b>6,22</b>	<i><b>8,19</b></i>
	THP06040	Ø6 x 40	✓	5,39	--	--	5,39	--	--
	THP06050	Ø6 x 50	✓		<b>6,22</b>	<b>7,99</b>		<b>6,22</b>	<b>7,99</b>
	THP06060	Ø6 x 60	✓						
	THP06080	Ø6 x 80	✓						
THP06100	Ø6 x 100	✓							

\*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

7.2 DESIGN RESISTANCE (NON-STRUCTURAL APPLICATION) [kN]									
General Parameter				Hollow core slabs					
Family	Code	Size	ETA Assessed	Tension $N_{Rd}$			Shear $V_{Rd}$		
				( $h_{ef1}$ )	( $h_{ef2}$ )	( $h_{ef3}$ )	( $h_{ef1}$ )	( $h_{ef2}$ )	( $h_{ef3}$ )
THE	THE05040	Ø5 x 40	✓*	2,99	--	--	3,59	--	--
	THE05050	Ø5 x 50	✓*		--	--		--	--
	THE05060	Ø5 x 60	✓*		3,45	4,57		4,14	5,46
	THE05080	Ø5 x 80	✓*						
	THE05100	Ø5 x 100	✓*						
	THE06035	Ø6 x 35	✓	2,99	--	--	3,59	--	--
	THE06040	Ø6 x 40	✓		--	--		--	--
	THE06045	Ø6 x 45	✓						
	THE06050	Ø6 x 50	✓						
	THE06060	Ø6 x 60	✓		3,45	4,44		4,14	5,33
	THE06070	Ø6 x 70	✓						
	THE06080	Ø6 x 80	✓						
THE06100	Ø6 x 100	✓							
THE06120	Ø6 x 120	✓							
THA	THA05040	Ø5 x 40	✓*	2,99	--	--	3,59	--	--
	THA05060	Ø5 x 60	✓*		3,45	4,57		4,14	5,46
	THA05080	Ø5 x 80	✓*						
	THA05100	Ø5 x 100	✓*						
	THA06045	Ø6 x 45	✓	2,99		--	3,59		--
	THA06050	Ø6 x 50	✓			--			--
	THA06060	Ø6 x 60	✓						
	THA06080	Ø6 x 80	✓		3,45	4,44		4,14	5,33
	THA06100	Ø6 x 100	✓						
THA06120	Ø6 x 120	✓							
THA06140	Ø6 x 140	✓							
THT	THT06040	Ø6 x 40	✓	2,99	--	--	3,59	--	--
	THT06050	Ø6 x 50	✓		3,45	4,44		4,14	5,33
	THT06060	Ø6 x 60	✓						
THP	THP05040	Ø5 x 40	✓*	2,99	--	--	3,59	--	--
	THP05060	Ø5 x 60	✓*		3,45	4,57		4,14	5,46
	THP06040	Ø6 x 40	✓	2,99	--	--	3,59	--	--
	THP06050	Ø6 x 50	✓						
	THP06060	Ø6 x 60	✓		3,45	4,44		4,14	5,33
	THP06080	Ø6 x 80	✓						
THP06100	Ø6 x 100	✓							

\*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

**7.3 MAXIMUM RECOMMENDED LOADS (NON-STRUCTURAL APPLICATION) [kN] (with  $\gamma_f=1.4$  )**

General Parameter				Hollow core slabs					
Family	Code	Size	ETA Assessed	Tension $N_{rec}$			Shear $V_{rec}$		
				( $h_{ef1}$ )	( $h_{ef2}$ )	( $h_{ef3}$ )	( $h_{ef1}$ )	( $h_{ef2}$ )	( $h_{ef3}$ )
THE	THE05040	Ø5 x 40	✓*	2,14	--	--	2,57	--	--
	THE05050	Ø5 x 50	✓*		--	--		--	--
	THE05060	Ø5 x 60	✓*		2,47	3,26		2,96	3,90
	THE05080	Ø5 x 80	✓*						
	THE05100	Ø5 x 100	✓*						
	THE06035	Ø6 x 35	✓	2,14	--	--	2,57	--	--
	THE06040	Ø6 x 40	✓		--	--		--	--
	THE06045	Ø6 x 45	✓						
	THE06050	Ø6 x 50	✓						
	THE06060	Ø6 x 60	✓		2,47	3,17		2,96	3,80
	THE06070	Ø6 x 70	✓						
	THE06080	Ø6 x 80	✓						
THE06100	Ø6 x 100	✓							
THE06120	Ø6 x 120	✓							
THA	THA05040	Ø5 x 40	✓*	2,14	--	--	2,57	--	--
	THA05060	Ø5 x 60	✓*		2,47	3,26		2,96	3,90
	THA05080	Ø5 x 80	✓*						
	THA05100	Ø5 x 100	✓*						
	THA06045	Ø6 x 45	✓	2,14	--	--	2,57	--	--
	THA06050	Ø6 x 50	✓						
	THA06060	Ø6 x 60	✓						
	THA06080	Ø6 x 80	✓		2,47	3,17		2,96	3,80
	THA06100	Ø6 x 100	✓						
THA06120	Ø6 x 120	✓							
THA06140	Ø6 x 140	✓							
THT	THT06040	Ø6 x 40	✓	2,14	--	--	2,57	--	--
	THT06050	Ø6 x 50	✓		2,47	3,17		2,96	3,80
	THT06060	Ø6 x 60	✓						
THP	THP05040	Ø5 x 40	✓*	2,14	--	--	2,57	--	--
	THP05060	Ø5 x 60	✓*		2,47	3,26		2,96	3,90
	THP06040	Ø6 x 40	✓	2,14	--	--	2,57	--	--
	THP06050	Ø6 x 50	✓						
	THP06060	Ø6 x 60	✓		2,47	3,17		2,96	3,80
	THP06080	Ø6 x 80	✓						
	THP06100	Ø6 x 100	✓						

\*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

**8. OFFICIAL DOCUMENTATION**

The following documents are available on our official website [www.indexfix.com](http://www.indexfix.com):

- European assessment ETA 20/0046 for Installation in cracked and non-cracked concrete according to guideline EAD 330232-01-0601, option 1, from Ø6 to Ø18.
- European assessment ETA 20/0494 for use in concrete and prestressed hollow core slabs for redundant non-structural systems according to guideline EAD 330747-00-0601 from Ø5 to Ø6.
- Declaration of performance DoP THE.
- VdS certificate CEA 4001:2021-01(07) *Guidelines for sprinklers systems. Planning and installation for applications of water extinguishing systems on concrete elements* from Ø8 to Ø18.
- Available in the anchor design software INDEXcal.