



EV-HA4



EV-MA4



GR-A4



GI-A4



GD-A4



SJ-A4



SJ-PSA4



SJ-PDA4



TS-GAA4



TS-AAA4







TS-GGA4

**CHARACTERISTICS**

- Accessories for cables and chains
- Made of A4 stainless steel
- Forged steel elements
- For securing large loads
- Use: for securing, fixing and protecting cables, etc.

**BASE MATERIAL**



| 1. RANGE |         |       |  |   |
|----------|---------|-------|--|---|
| ITEM     | CODE    | TYPE  | PHOTO  | MATERIAL  |
| 1        | EV-HA4  | 582   |    |    |
| 2        | EV-MA4  | 580   |    |    |
| 3        | GR-A4   | 82101 |    |    |
| 4        | GI-A4   | ----  |    |    |
| 5        | GD-A4   | 6899A |    |    |
| 6        | SJ-A4   | 741   |   |   |
| 7        | SJ-PSA4 | ---   |  |  |
| 8        | SJ-PDA4 | ---   |  |  |
| 9        | TS-GAA4 | 1480  |  |  |
| 10       | TS-AAA4 | 1480  |  |  |
| 11       | TS-GGA4 | 1480  |  |  |

## 2. INSTALLATION DATA

### 2.1 EV-HA4

#### Female eyebolt D-582, A4 Stainless Steel



A4 Stainless Steel

Cable

Chain

Rope


#### Installation Data

| CODE    | CABLE Ø | M   | D1 [mm] | D2 [mm] | L1 [mm] | H1 [mm] | Axial load capacity per ring (WLL)* [kg] | Load capacity per ring (WLL)* [kg]<br>0° < β ≤ 45° | Load capacity per ring (WLL)* [kg] |              |
|---------|---------|-----|---------|---------|---------|---------|--|--|------------------------------------|--------------|
|         |         |     |         |         |         |         |  |  | 45° < β ≤ 60°                      | 0° < β ≤ 45° |
|         |         |     |         |         |         |         |  |  |                                    |              |
| EVHA406 | 18      | M6  | 15      | 16      | 27      | 27      | 75                                       | 55   | 38                                 |              |
| EVHA408 | 20      | M8  | 20      | 20      | 36      | 36      | 140                                      | 100  | 70                                 |              |
| EVHA410 | 25      | M10 | 25      | 25      | 45      | 45      | 230                                      | 170  | 115                                |              |
| EVHA412 | 30      | M12 | 30      | 30      | 52      | 51      | 340                                      | 240  | 170                                |              |
| EVHA414 | 35      | M14 | 30      | 30      | 54      | 53      | 490                                      | 350  | 245                                |              |
| EVHA416 | 35      | M16 | 35      | 35      | 63      | 62      | 700                                      | 500  | 350                                |              |
| EVHA420 | 40      | M20 | 38      | 40      | 70      | 68      | 1200                                     | 860  | 600                                |              |
| EVHA424 | 50      | M24 | 50      | 50      | 90      | 90      | 1800                                     | 1290   | 900                                |              |

#### CHARACTERISTICS

- Eyebolt type 582
- A4 Stainless Steel
- Female thread
- Easy installation
- For parts whose attachment point presents a male thread
- Not valid for use as personal protective equipment (PPE)

#### DRAWING

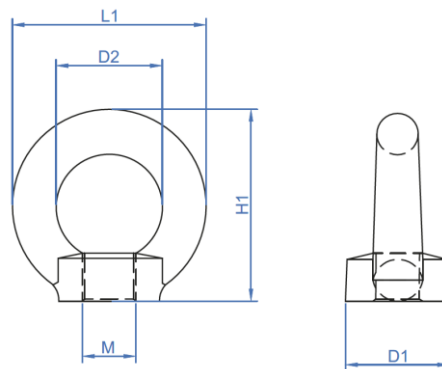

\*WLL= Working Load Limit. Is the maximum safe force that a piece of lifting equipment can exert to lift, suspend, or lower, a given mass without fear of breaking.

**2.2 EV-MA4**

**Male eyebolt D-580, A4 Stainless Steel**



A4 Stainless Steel

Cable

Chain

Rope


**Installation Data**

| CODE    | CABLE Ø | M   | D1 [mm] | D2 [mm] | L1 [mm] | H1 [mm] | Axial load capacity per ring (WLL)* [kg] | Load capacity per ring (WLL)* [kg]<br>0° < β ≤ 45° | Load capacity per ring (WLL)* [kg] |              |
|---------|---------|-----|---------|---------|---------|---------|--|--|------------------------------------|--------------|
|         |         |     |         |         |         |         |  |  | 45° < β ≤ 60°                      | 0° < β ≤ 45° |
| EVHA406 | 20      | M6  | 15      | 15      | 27      | 27      | 75                                       | 55   | 38                                 |              |
| EVHA408 | 20      | M8  | 20      | 20      | 36      | 36      | 140                                      | 100  | 70                                 |              |
| EVHA410 | 25      | M10 | 25      | 25      | 45      | 45      | 230                                      | 170  | 115                                |              |
| EVHA412 | 30      | M12 | 30      | 30      | 54      | 53      | 340                                      | 240  | 170                                |              |
| EVHA414 | 35      | M14 | 30      | 30      | 54      | 53      | 490                                      | 350  | 245                                |              |
| EVHA416 | 35      | M16 | 35      | 35      | 63      | 62      | 700                                      | 500  | 350                                |              |
| EVHA420 | 40      | M20 | 40      | 40      | 72      | 71      | 1200                                     | 860  | 600                                |              |
| EVHA424 | 50      | M24 | 50      | 49      | 90      | 90      | 1800                                     | 1290   | 900                                |              |

**CHARACTERISTICS**

- Eyebolt type 582
- A4 Stainless Steel
- Male thread
- Easy installation
- For parts whose attachment point presents a male thread
- Not valid for use as personal protective equipment (PPE)

**DRAWING**

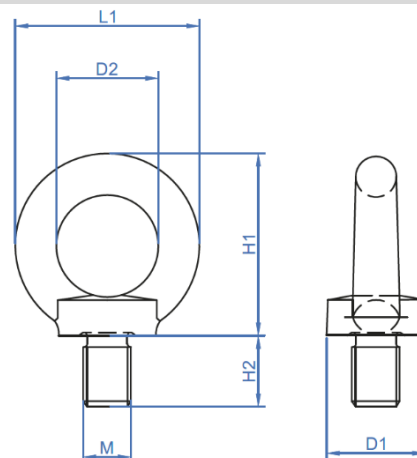

\*WLL= Working Load Limit. Is the maximum safe force that a piece of lifting equipment can exert to lift, suspend, or lower, a given mass without fear of breaking.

**2.3 GR-A4**

**Straight Shackle, A4 Stainless Steel**



**Material**



A4 Stainless Steel

**Base material**



Cable

Chain

Rope


**Installation Data**

| CODE   | CABLE Ø [mm] | M   | A [mm] | B [mm] | ØD [mm] | d [mm] | C [mm] | (WLL)* Axial load capacity in kg |
|--------|--------------|-----|--------|--------|---------|--------|--------|----------------------------------|
| GRA404 | 8            | M4  | 10     | 11     | 4       | 4      | 19     | 70                               |
| GRA405 | 10           | M5  | 10     | 11     | 5       | 5      | 19     | 100                              |
| GRA406 | 12           | M6  | 13     | 11     | 6       | 6      | 25     | 160                              |
| GRA408 | 16           | M8  | 16     | 18     | 8       | 8      | 32     | 250                              |
| GRA410 | 19           | M10 | 19     | 20     | 10      | 10     | 38     | 400                              |
| GRA412 | 25           | M12 | 25     | 26     | 12      | 12     | 51     | 600                              |
| GRA414 | 28           | M14 | 29     | 26     | 14      | 14     | 55     | 750                              |
| GRA416 | 32           | M16 | 32     | 33     | 16      | 16     | 64     | 1000                             |
| GRA419 | 38           | M19 | 38     | 40     | 19      | 19     | 76     | 1600                             |
| GRA425 | 50           | M25 | 51     | 57     | 25      | 25     | 100    | 2000                             |

**CHARACTERISTICS**

- Straight shackle type 82101
- A4 Stainless Steel
- Easy installation
- Fastening element to use with rings and other items
- For correct use, the bolt must always be attached to the straight pin, while the cable must pull from the shackle bow
- High quality finish
- Not valid for use as personal protective equipment (PPE)

**DRAWING**

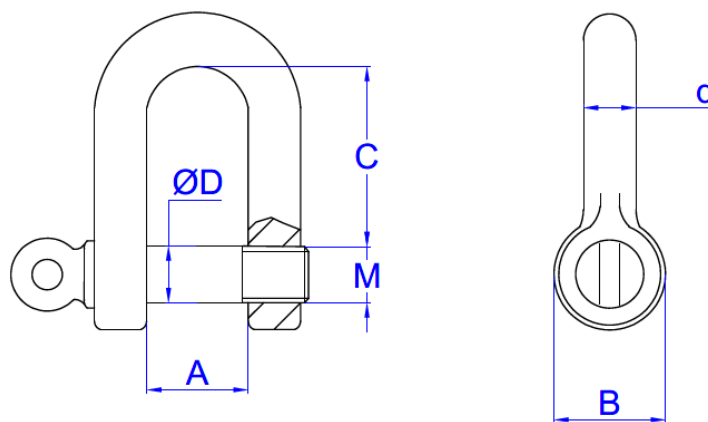

\*WLL= Working Load Limit. Is the maximum safe force that a piece of lifting equipment can exert to lift, suspend, or lower, a given mass without fear of breaking.

**2.4 GI-A4**

**Bow Shackle, A4 Stainless Steel**



**Material**



A4 Stainless Steel

**Base material**



Cable



Chain



Rope


**Installation Data**

| CODE   | CABLE Ø [mm] | M   | A [mm] | b [mm] | ØD [mm] | L1 [mm] | L2 [mm] | H1 [mm] | (WLL)* Axial load capacity in kg |
|--------|--------------|-----|--------|--------|---------|---------|---------|---------|----------------------------------|
| GIA404 | 8            | M5  | 10     | 11     | 5       | 5       | 11      | 20      | 100                              |
| GIA405 | 10           | M6  | 12     | 11     | 6       | 6       | 14      | 24      | 160                              |
| GIA406 | 12           | M8  | 16     | 14     | 8       | 8       | 18      | 32      | 250                              |
| GIA408 | 16           | M10 | 20     | 18     | 10      | 10      | 20      | 40      | 400                              |
| GIA410 | 19           | M11 | 22     | 20     | 11      | 12      | 26      | 44      | 470                              |
| GIA412 | 25           | M12 | 24     | 33     | 12      | 16      | 33      | 48      | 600                              |
| GIA414 | 28           | M14 | 28     | 40     | 24      | 20      | 40      | 56      | 750                              |
| GIA416 | 32           | M16 | 32     | 50     | 26      | 22      | 50      | 64      | 1000                             |

**DRAWING**

- Easy installation
- A4 Stainless Steel
- Fastening element to use with rings and other items
- For correct use, the bolt must always be attached to the straight pin, while the cable must pull from the shackle bow
- High quality finish
- Not valid for use as personal protective equipment (PPE)

**CHARACTERISTICS**

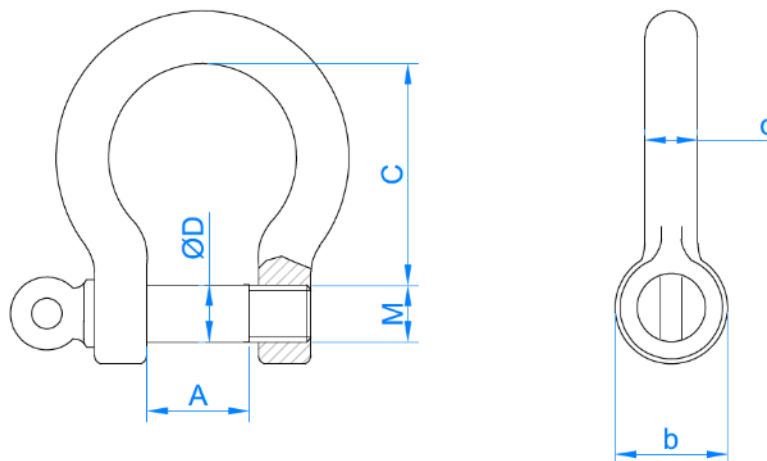

\*WLL= Working Load Limit. Is the maximum safe force that a piece of lifting equipment can exert to lift, suspend, or lower, a given mass without fear of breaking.

2.5 GD-A4

Thimble, A4 Stainless Steel



Material



A4 Stainless Steel

Base material



Cable



Chain





Rope

Installation Data

| CODE   | CABLE Ø [mm] | A [mm] | B [mm] | L1 [mm] | L2 [mm] | Characteristics   |
|--------|--------------|--------|--------|---------|---------|---|
| GDA402 | 2            | 12     | 19     | 3,0     | 1,5     | <ul style="list-style-type: none"> <li>- Thimble conforming DIN 6899A</li> <li>- Stainless steel A4</li> <li>- Easy installation</li> <li>- Element to ensure cable protection against friction</li> <li>- High quality finish</li> </ul> |
| GDA403 | 3            | 13     | 21     | 3,5     | 1,5     |   |
| GDA404 | 4            | 14     | 23     | 5,0     | 2,0     |   |
| GDA405 | 5            | 16     | 25     | 6,0     | 2,5     |   |
| GDA406 | 6            | 18     | 28     | 7,0     | 2,5     |   |
| GDA408 | 8            | 24     | 37     | 9,0     | 3,0     |   |
| GDA410 | 10           | 28     | 45     | 11,0    | 3,5     |   |
| GDA412 | 12           | 30     | 48     | 13,0    | 3,5     |   |
| GDA415 | 15           | 36     | 58     | 16,0    | 3,5     |   |

DRAWING

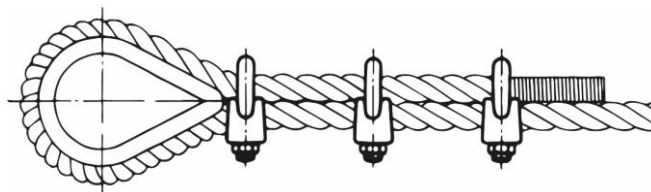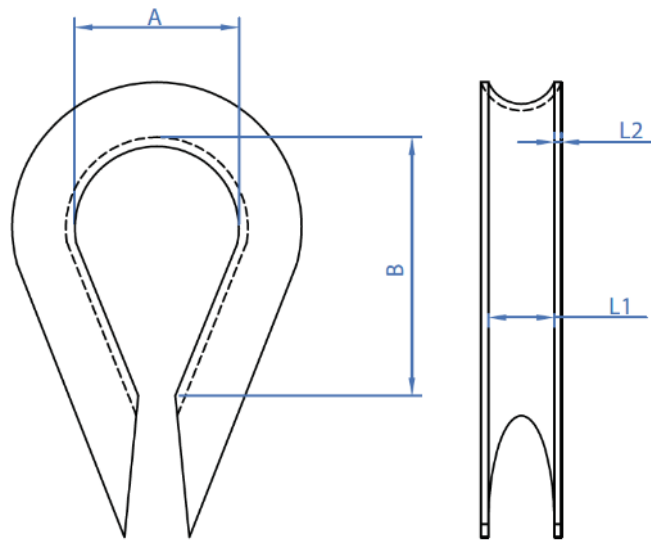

**2.6 SJ-A4**

**Wire rope clip A4, Stainless Steel**



**Material**




A4 Stainless Steel

**Base material**



Cable



Chain





Rope

**Installation Data**

| CODE     | CABLE Ø | M   | A  | B  | ØD | H1 | H2 | L1 | L2 | Sw         | Characteristics  |
|----------|---------|-----|----|----|----|----|----|----|----|------------|--|
| SJA42103 | 3       | M4  | 9  | 12 | 4  | 20 | 10 | 21 | 10 | 6.78 ÷ 7   | <ul style="list-style-type: none"> <li>- Wire rope clip type 741</li> <li>- Easy installation</li> <li>- Cable fixing element in conjunction with thimbles and others</li> <li>- For correct use of the wire rope clip, the distance between fixings must be between 1.5 and 3 times the width of L2.</li> <li>- High quality finish.</li> </ul> |
| SJA42305 | 5       | M5  | 11 | 13 | 6  | 24 | 10 | 23 | 11 | 7.78 ÷ 8   |  |
| SJA42606 | 6       | M5  | 13 | 15 | 8  | 28 | 11 | 26 | 12 |            |  |
| SJA43008 | 8       | M6  | 16 | 19 | 9  | 34 | 15 | 30 | 14 | 9.78 ÷ 10  |  |
| SJA43410 | 10      | M8  | 19 | 22 | 11 | 42 | 17 | 34 | 18 | 12.73 ÷ 13 |  |
| SJA43611 | 11      | M8  | 20 | 22 | 12 | 44 | 18 | 36 | 19 |            |  |
| SJA44414 | 14      | M10 | 24 | 30 | 15 | 56 | 22 | 44 | 23 | 16.73 ÷ 17 |  |
| SJA45016 | 16      | M12 | 29 | 33 | 17 | 63 | 26 | 50 | 26 | 18.67 ÷ 19 |  |
| SJA45418 | 18      | M12 | 30 | 37 | 21 | 75 | 29 | 53 | 28 |            |  |
| SJA46122 | 22      | M14 | 38 | 44 | 23 | 85 | 34 | 61 | 33 | 21.67 ÷ 22 |  |
| SJA46525 | 25      | M14 | 42 | 45 | 27 | 95 | 37 | 65 | 35 |            |  |

**DRAWING**

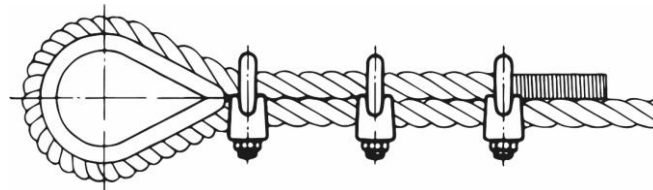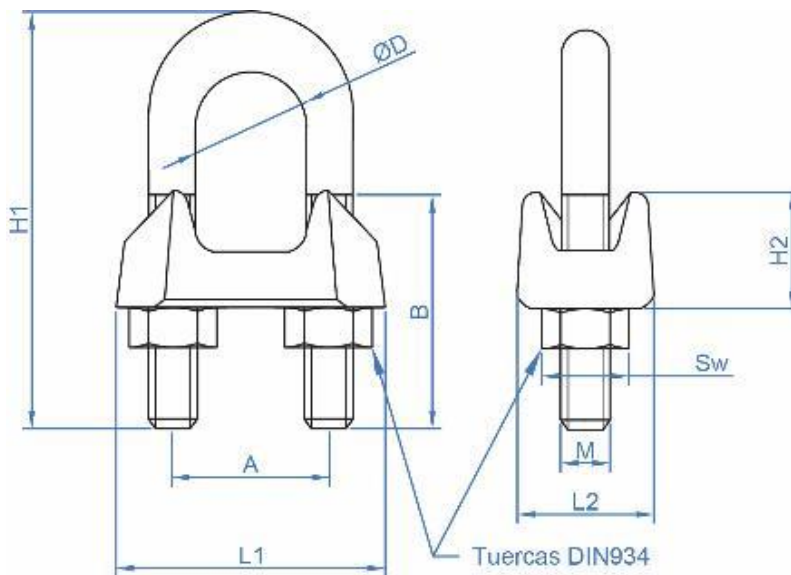



**2.7 SJ-PSA4**

**Single flat wire rope clip, A4 Stainless Steel**



**Material**




A4 Stainless Steel

**Base material**



Cable



Chain




Rope

**Installation Data**

| CODE       | CABLE Ø | M  | A  | B  | C   | L    | Characteristics   |
|------------|---------|----|----|----|-----|------|---|
| SJPSA40403 | 3       | M4 | 14 | 14 | 7,0 | 20,0 | <ul style="list-style-type: none"> <li>- Single flat wire rope clip</li> <li>- A4 Stainless Steel.</li> <li>- Easy installation</li> <li>- A more aesthetic assembly is achieved by reducing the visibility on the joints</li> <li>- Metric nut that locks the cable against a metal plate</li> <li>- Not valid for use as personal protective equipment (PPE)</li> </ul> |
| SJPSA40504 | 4       | M5 | 16 | 17 | 7,0 | 22,5 |   |
| SJPSA40605 | 5       | M6 | 16 | 21 | 8,5 | 26,0 |   |
| SJPSA40606 | 6       | M6 | 21 | 21 | 9,0 | 30,0 |   |

**DRAWING**

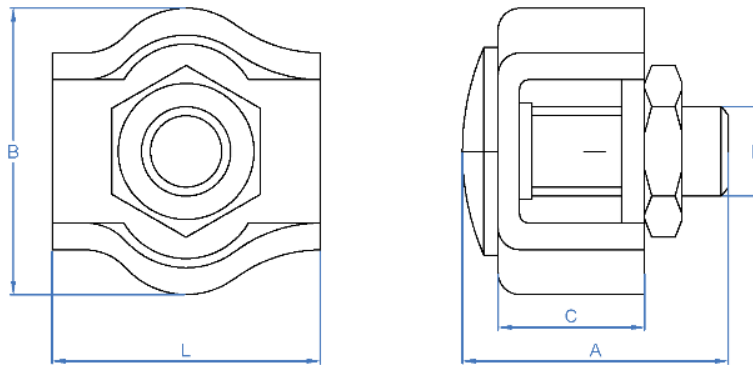

**2.8 SJ-PDA4**

**Double flat wire rope clip, A4 Stainless Steel**



**Material**




A4 Stainless Steel

**Base material**



Cable



Chain




Rope

**Installation Data**

| CODE       | CABLE Ø | M  | A  | B  | C   | I  | Characteristics  |
|------------|---------|----|----|----|-----|----|--|
| SJPDA40402 | 2       | M4 | 14 | 13 | 5,0 | 37 | <ul style="list-style-type: none"> <li>- Double flat wire rope clip</li> <li>- A4 Stainless Steel</li> <li>- Easy installation</li> <li>- A more aesthetic assembly is achieved by reducing the visibility on the joints</li> <li>- Two metric nuts that lock the cable against a metal plate</li> <li>- Not valid for use as personal protective equipment (PPE)</li> </ul> |
| SJPDA40403 | 3       | M4 | 14 | 14 | 7,0 | 40 |  |
| SJPDA40504 | 4       | M5 | 16 | 17 | 7,0 | 45 |  |
| SJPDA40605 | 5       | M5 | 16 | 21 | 8,5 | 52 |  |
| SJPDA40606 | 6       | M6 | 23 | 26 | 9,0 | 60 |  |

**DRAWING**

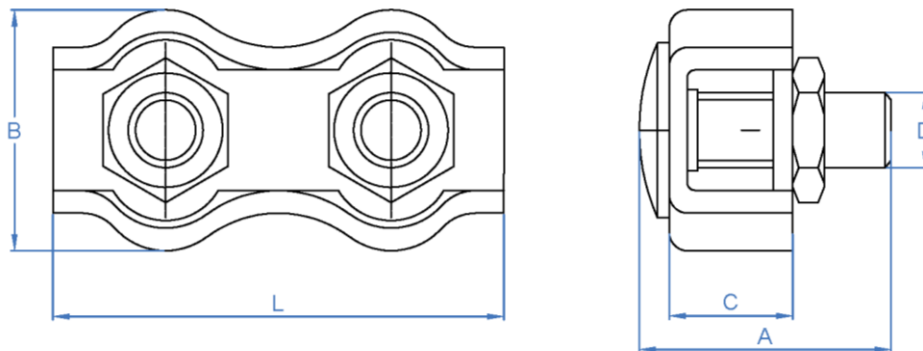

**2.9 TS-GAA4**

**Hook/Ring wire tightener, A4 Stainless Steel**



**Material**



A4 Stainless Steel

**Base material**



Cable



Chain



Rope



**Installation Data**

| CODE     | M   | A [mm] | B [mm] | C [mm] | F [mm] | ØD [mm] | Ød [mm] | I [mm] | J [mm] | G [mm] | (WLL)* Axial load capacity per ring |
|----------|-----|--------|--------|--------|--------|---------|---------|--------|--------|--------|-------------------------------------|
| TSGAA405 | M5  | 70     | 62     | 50     | 7      | 15,5    | 8,0     | 7,0    | 36,0   | 36,0   | 50                                  |
| TSGAA406 | M6  | 110    | 98     | 86     | 9      | 20,5    | 10,0    | 8,0    | 55,0   | 55,0   | 75                                  |
| TSGAA410 | M10 | 130    | 107    | 88     | 13     | 31,5    | 14,0    | 12,0   | 67,5   | 68,0   | 235                                 |
| TSGAA412 | M12 | 140    | 103    | 83     | 16     | 35,0    | 17,0    | 15,0   | 65,0   | 70,0   | 320                                 |


**Characteristics**

- Hook / ring wire tightener conforming DIN 1480
- A4 Stainless Steel
- Easy installation
- Allows for different applications, great mounting versatility thanks to the combination of hook and ring.
- High quality finish



**DRAWING**

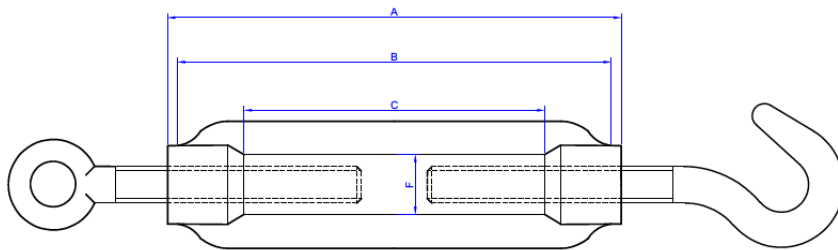

- Left threaded ring



- Right threaded hook

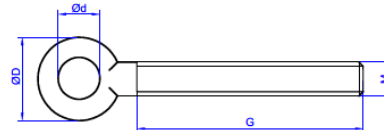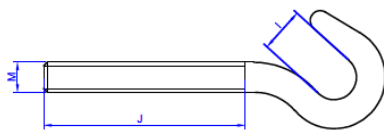

\*WLL= Working Load Limit. Is the maximum safe force that a piece of lifting equipment can exert to lift, suspend, or lower, a given mass without fear of breaking.

**2.10 TS-AAA4**

**Hook/Hook wire tightener, A4 Stainless Steel**



**Material**



A4 Stainless Steel

**Base material**



Cable

Chain

Rope


**Installation Data**

| CODE    | M   | A [mm] | B [mm] | C [mm] | F [mm] | ØD [mm] | Ød [mm] | G [mm] | H [mm] |
|---------|-----|--------|--------|--------|--------|---------|---------|--------|--------|
| TSAA005 | M5  | 70     | 62     | 50     | 7      | 15,5    | 8,0     | 36     | 58,5   |
| TSAA006 | M6  | 110    | 98     | 86     | 9      | 20,5    | 10,0    | 55     | 81,5   |
| TSAA008 | M8  | 110    | 94     | 80     | 11     | 22,5    | 11,0    | 55     | 86,5   |
| TSAA010 | M10 | 130    | 107    | 88     | 13     | 31,5    | 14,0    | 68     | 106,5  |
| TSAA012 | M12 | 140    | 103    | 83     | 16     | 35,0    | 17,0    | 70     | 113,0  |

**Characteristics**

- Ring / ring wire tightener conforming DIN 1480
- A4 Stainless Steel
- Easy installation
- Optimal assembly for applications that require a high level of security and greater tensile strength, which is guaranteed by placing rings on both sides of the wire tightener.
- High quality finish

**DRAWING**

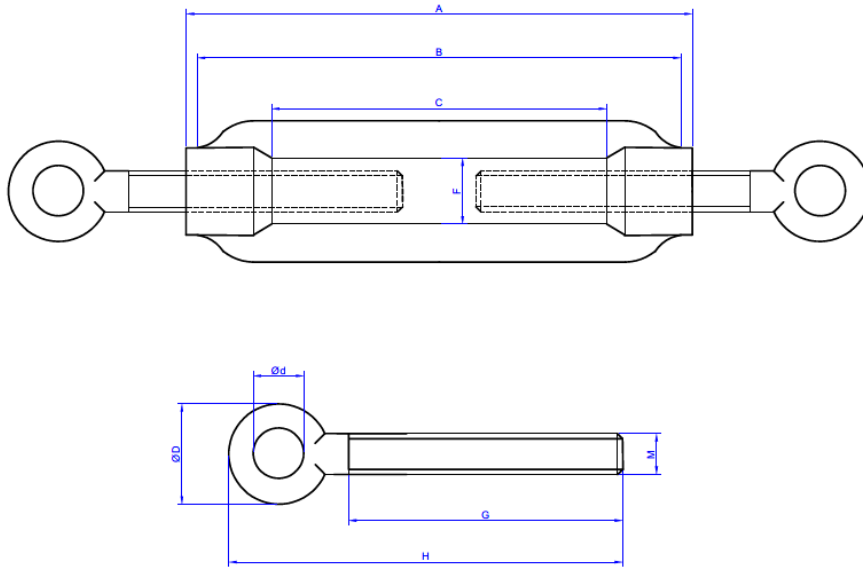

**2.11 TS-GGA4**

**Wire tightener Hook/Hook, A4 Stainless Steel**



Stainless Steel

**Base material**



Cable



Chain



Rope


**Installation Data**

| CODE   | M   | A [mm] | B [mm] | C [mm] | F [mm] | I [mm] | G [mm] | H [mm] | (WLL)* Axial load capacity in kg |
|--------|-----|--------|--------|--------|--------|--------|--------|--------|----------------------------------|
| TSGA05 | M5  | 70     | 62     | 50     | 7      | 7,0    | 36,0   | 63,5   | 50                               |
| TSGA06 | M6  | 110    | 98     | 86     | 9      | 8,0    | 55,0   | 86,0   | 75                               |
| TSGA08 | M8  | 110    | 94     | 80     | 11     | 9,5    | 51,5   | 96,0   | 100                              |
| TSGA10 | M10 | 130    | 107    | 89     | 13     | 12,0   | 67,5   | 119,5  | 235                              |
| TSGA12 | M12 | 140    | 103    | 83     | 16     | 15,0   | 65,0   | 130,5  | 320                              |

**Characteristics**

- Wire tightener hook / hook conforming DIN 1480
- A4 Stainless Steel
- Double hook allows for quick and easy installation
- Especially for applications where it is necessary to tighten ropes with loops, rig cables, bars, chains, etc. (Faster installation)
- High quality finish

**DRAWING**

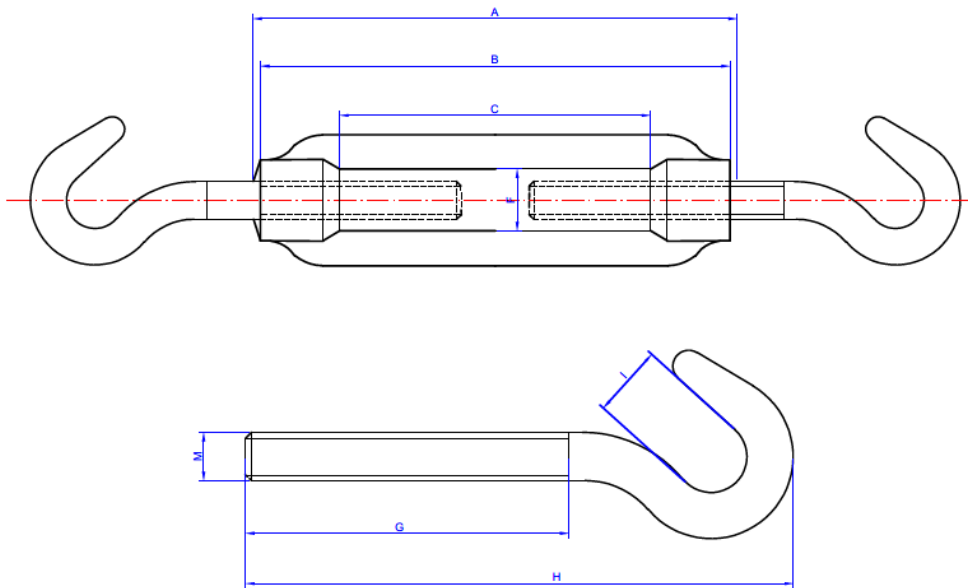


\*WLL= Working Load Limit. Is the maximum safe force that a piece of lifting equipment can exert to lift, suspend, or lower, a given mass without fear of breaking.

## 4. INSTALLATION PROCESS AND RECOMMENDATIONS

### 4.1 EV-HA4 / EV-MA4

#### Female/male eyebolt, zinc plated

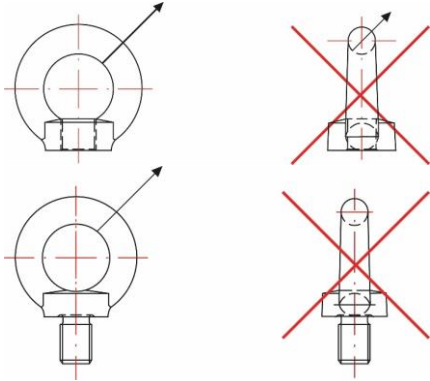

- Before use, check that the ring is correctly seated and without apparent damage.
- Do not use deformed rings or reuse them, they should be replaced if at all possible.
- In case of installing the eyebolt on a through hole, a fully threaded and tightened nut is required on the other side.
- The permissible load values shown in the second column refer to a maximum angle of 45°, and the maximum values shown in the third column refer to a maximum angle of 45° in all directions in respect of the flat ring. The rings should not be loaded from the side (see enclosed images). In cases where there is a specific position to thread the ring, use appropriate washers to avoid unauthorized loads.

### 4.2 GR-A4

#### Straight shackle, zinc plated

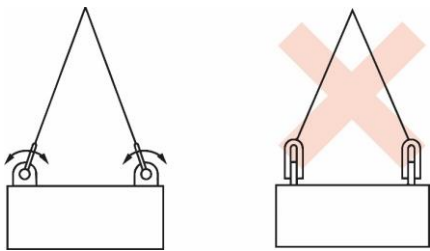


Figure 1

##### 1. Assembly, General:

- Shackles should be inspected prior to use to ensure that:
  - a) Both the body and the shackle pin are of the same size, type and manufacture.
  - b) All markings are readable.
  - c) Body and pin threads are not damaged.
  - d) Body and pin are not twisted.
  - e) Body and pin do not show unnecessary wear.
  - f) Body and pin are free of dents, notches, cracks and corrosion.
- Ensure, if applicable, that the pin is correctly screwed to the head of the shackle, i.e. tighten by hand and then use a pricker or other suitable tool, until the flattened part of the pin seats on the head of the shackle. Make sure the pin is long enough to go all the way into the threaded head, or until the flattened part of the pin hits against the other head.
- In all cases, when the pin is correctly attached to the body of the shackle, the width between the two legs, W, should not be significantly reduced.
- Incorrect pin positioning can be caused by a bent pin, a smaller thread pitch or misaligned holes. In these cases, the shackle must never be used.

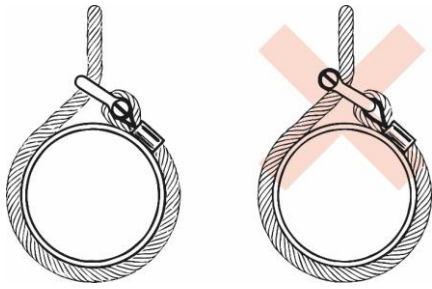


Figure 2

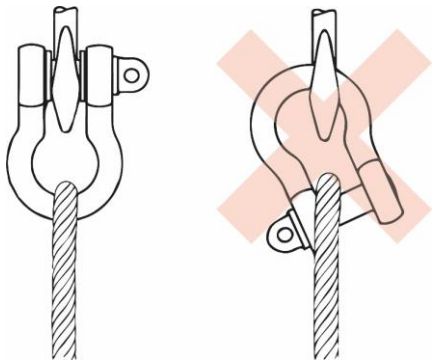


Figure 3

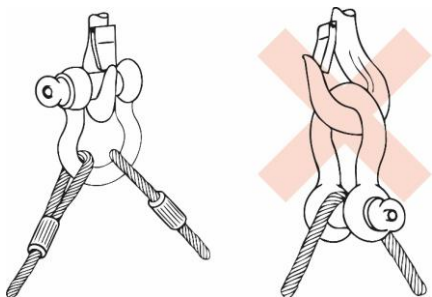


Figure 4

- Never substitute a shackle pin except for one of the same size, grade and specification, as it may not be suitable for the required loads.

2. Use

- The correct type of shackle for each application is selected based on the information provided in the following sections.

- Shackles should not be used in a way that lateral loads are generated. Generally, this means that the shackle body should receive the load along the axis on its centre line (see figure 1).

- When shackles are used with multi-leg slings, the effect of the angle between the legs of the sling should be taken into account. The more the angle opens, the more the load increases on each leg of the sling and therefore on the shackles.

- When a shackle is used to join two slings to the hook of a hoist, the two slings should be joined together on the body of a bow shackle, and the hook placed on the shackle pin. The angles between the slings must not be greater than 120°.

- To avoid loading the shackle with an eccentric load, place spacers on one or both ends of the shackle pin (see figure 2).

- The width between the shackle clamps must not be reduced by welding washers or spacers to the inside faces of the heads, or by closing the clamps, as this will have a harmful effect on the properties of the shackle.

- When a shackle is used to secure the top of a bundle of cables, the load on that shackle is increased by the hoist effect.

- Avoid uses in which, due to movement (e.g., load or cable), the shackle pin might rotate and eventually get loose (see figures 3 and 4).

- In those uses where the pin must be left in place for extended periods of time, or where maximum security is required, an X type pin should be used.

- Avoid uses where the load is unstable (see figure 4).

- Shackles should not be modified, thermally treated, galvanized or coated without the approval of the manufacturer.

- Do not use shackles out of the temperature range -20°C to 200°C without consulting the manufacturer.

- Shackles should not be immersed in acid solutions or exposed to acid fumes or other chemicals without the approval of the manufacturer. Please, be aware that certain manufacturing processes involve acid solutions, fumes, etc. and in these cases advice should be sought from the manufacturer.

- The choice of shackles assumes the absence of exceptionally hazardous conditions. Exceptionally hazardous conditions include offshore activities, lifting people, and lifting potentially dangerous loads such as molten metal, corrosive materials, or fissile materials. In such scenarios, a qualified professional should assess the level of risk and the safe lifting load should be reduced accordingly from the maximum working load.